

TECHNICAL DATASHEET




EF TEE 90°

04 Update - 03/2023

TECHNICAL DATA

| | |
|-----------------------|-------------------|
| Article No | 001 117 2041 0125 |
| d (mm) | 125 |
| D (mm) | 158 |
| Z (mm) | 268 |
| L (mm) | 180 |
| le1 (mm) | 77 |
| le2 (mm) | 87 |
| m (mm) | 36 |
| Weight (Kg) | 2,400 |
| Box Quantity (pcs) | 4 |
| Box Dimension (cm) | 55x30x36 |

INJECTION MOULDED

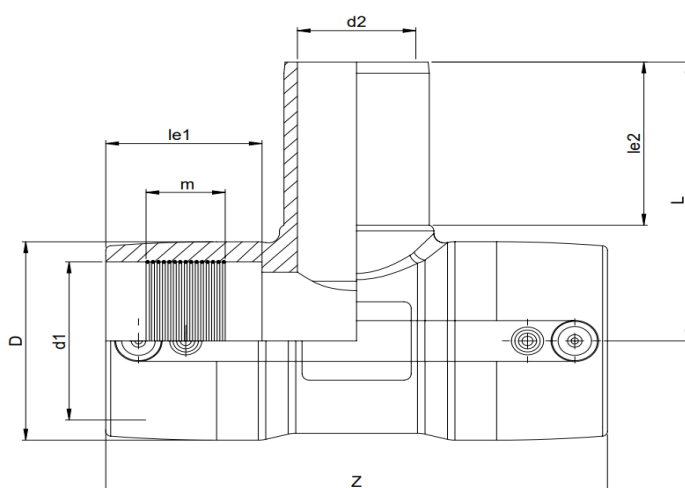

IDENTIFICATION OF PRODUCT

| | |
|----------------|--|
| D(mm) | 125 |
| SDR | 11 |
| RAW MATERIAL | PE 100 |
| PRESSURE CLASS | 16 Bar Water 10 Bar Gas |
| TRADEMARK | NTG |
| EXECUTION | Injection Moulded |
| STANDARD | EN 12201-3 EN 1555-3 AS / NZS 4129 |
| SPECIFICATION | Suitable for SDR9...17 pipe 4 mm pin connectors |

EF SPECIFICATION

| | |
|-----------------|---------------|
| WELDING VOLTAGE | 40V |
| RESISTANCE | 1.15 Ω |
| WELDING TIME | 300 Sec. |
| COOLING TIME | 15 Min. |
| WINDING TYPE | Monofilar |
| WELDING BARCODE | |



971420321253401156300119

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance $\pm 5\%$. NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.