

# TECHNICAL DATASHEET




## EF COUPLER

04 Update - 02/2023

### TECHNICAL DATA

Article No	001 117 2160 0355
d (mm)	355
D (mm)	433
Z (mm)	280
m (mm)	70
Weight (Kg)	10,38
Box Quantity (pcs)	1
Box Dimension (cm)	55x30x42

### INJECTION MOULDED

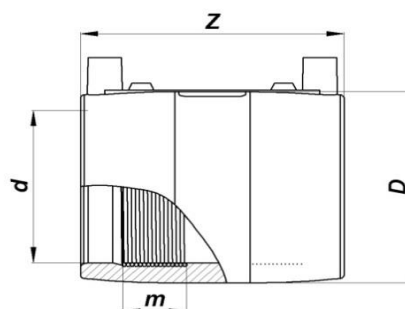

### IDENTIFICATION OF PRODUCT

D(mm)	355
SDR	11
RAW MATERIAL	PE 100
PRESSURE CLASS	16 Bar Water 10 Bar Gas
TRADEMARK	NTG
EXECUTION	Injection Moulded
STANDARD	EN 12201-3

### SPECIFICATION

EN 1555-3  
AS / NZS 4129  
Suitable for SDR9...17 pipe  
Removable center stopper ( up to 400 mm )  
4 mm pin connectors

### EF SPECIFICATION

WELDING VOLTAGE	40 V
RESISTANCE	0.50 $\Omega$
WELDING TIME	1200 Sec.
COOLING TIME	30 Min.
WINDING TYPE	Monofilar
WELDING BARCODE	



951420343553400506920114

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance  $\pm 5\%$ . NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.