


FLANGE ADAPTOR

03 Update - 07/2022

TECHNICAL DATA

Article No	001 115 1103 0560
d (mm)	560
d1 (mm)	580
d2 (mm)	654
d3 (mm)	570
le (mm)	43
L (mm)	80
Z (mm)	180
s (mm)	33,2
Weight (Kg)	12,930
Box Quantity (pcs)	1
Box Dimension (pcs)	

INJECTION MOULDED

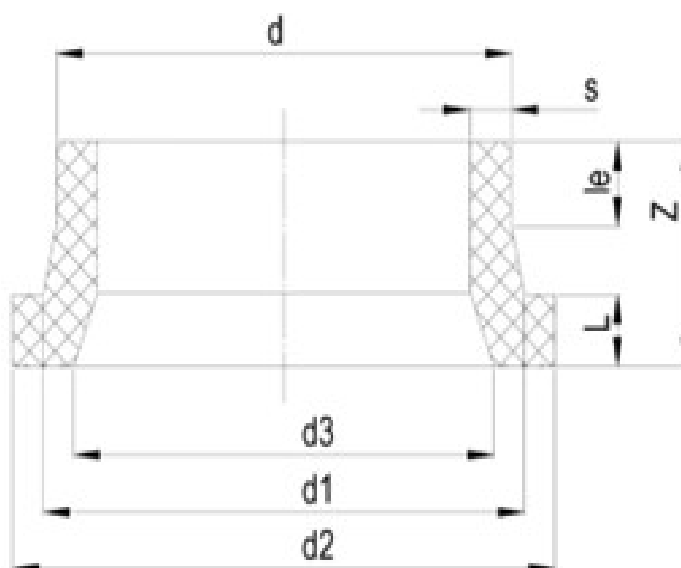

IDENTIFICATION OF PRODUCT

D(mm)	560
SDR	17
RAW METARIAL	PE 100
PRESSURE CLASS	16 Bar Water 10 Bar Gas
TRADEMARK	NTG
EXECUTION	Injection Moulded
STANDARD	EN 12201-3 EN 1555-3 AS /NZS 4129

SPECIFICATION

Short Spigot
Suitable for butterfly valve
Chamfered finish, where d3 size is given
Suitable for ansi flange
Spacer needed for butterfly valve

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance $\pm 5\%$. NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.