

TECHNICAL DATASHEET




EF REDUCER

03 Update - 01/2024

TECHNICAL DATA

Article No	001 117 2080 0064
d1 (mm)	63
d2 (mm)	50
D1 (mm)	81
D2 (mm)	68
le1 (mm)	62
le2 (mm)	49
Z (mm)	117
m1 (mm)	26,5
m2 (mm)	23
Weight (Kg)	0,212
Box Quantity (pcs)	60
Box Dimension (cm)	55x30x37,5

INJECTION MOULDED

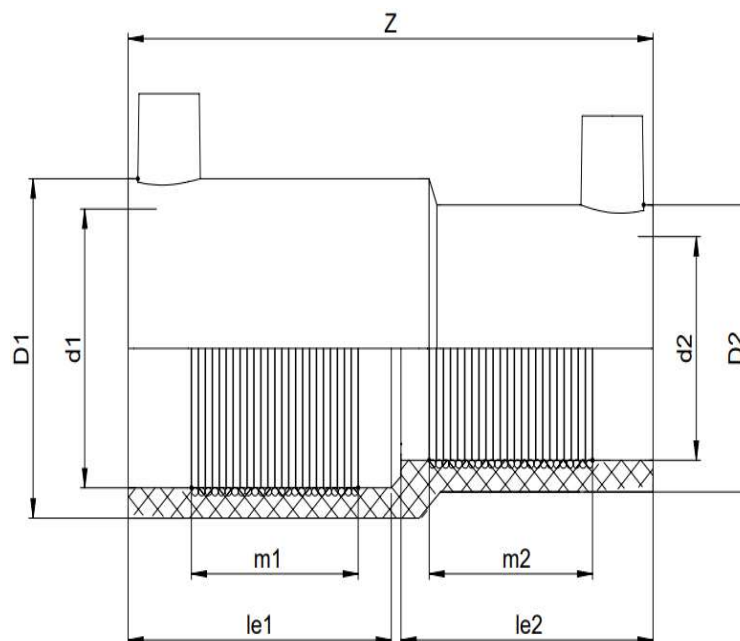

IDENTIFICATION OF PRODUCT

D(mm)	63-50
SDR	11
RAW MATERIAL	PE 100
PRESSURE CLASS	16 Bar Water 10 Bar Gas
TRADEMARK	NTG
EXECUTION	Injection Moulded
STANDARD	EN 12201-3 EN 1555-3 AS / NZS 4129

SPECIFICATION	Suitable for SDR9...11 pipe 4 mm pin connectors
---------------	--

EF SPECIFICATION

WELDING VOLTAGE	40V
RESISTANCE	0,96 Ω
WELDING TIME	40 Sec.
COOLING TIME	10 Min.
WINDING TYPE	Monofilar
WELDING BARCODE	



931420311593400966040116

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance $\pm 5\%$. NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.