

# TECHNICAL DATASHEET



## FLANGE ADAPTOR

03 Update - 07/2022


### TECHNICAL DATA

|                        |                   |
|------------------------|-------------------|
| Article No             | 001 115 1100 0710 |
| d<br>(mm)              | 710               |
| d1<br>(mm)             | 740               |
| d2<br>(mm)             | 800               |
| d3<br>(mm)             | 670               |
| le<br>(mm)             | 40                |
| L<br>(mm)              | 50                |
| Z<br>(mm)              | 130               |
| s<br>(mm)              | 42,1              |
| Weight<br>(Kg)         | 15,640            |
| Box Quantity<br>(pcs)  | 1                 |
| Box Dimension<br>(pcs) |                   |

### IDENTIFICATION OF PRODUCT

|                |   |
|----------------|---|
| D(mm)          | 710                                     |
| SDR            | 17                                      |
| RAW METARIAL   | PE 100                                  |
| PRESSURE CLASS | 10 Bar Water 5 Bar Gas                  |
| TRADEMARK      | NTG                                     |
| EXECUTION      | Injection Moulded                       |
| STANDARD       | EN 12201-3<br>EN 1555-3<br>AS /NZS 4129 |

### INJECTION MOULDED

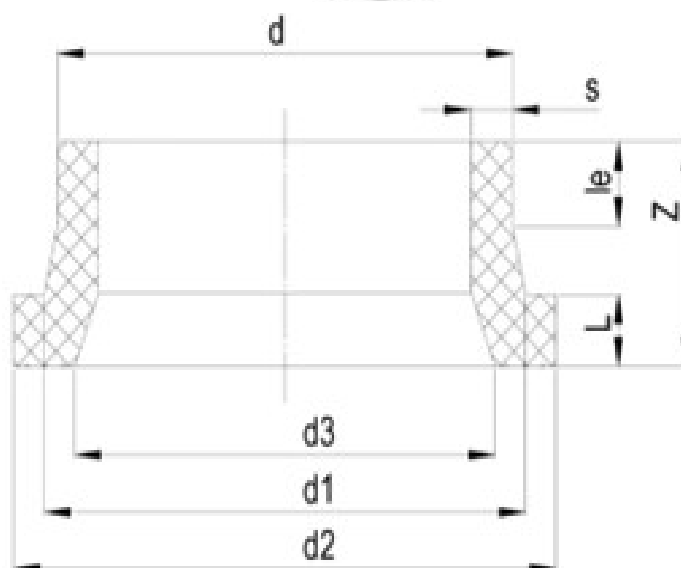

### SPECIFICATION

Short Spigot  
Suitable for butterfly valve  
Not suitable for ansi flange

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance  $\pm 5\%$ . NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.

Fr 161 Rev 00