

TECHNICAL DATASHEET




EF TAPPING SADDLE

04 Update - 01/2023

TECHNICAL DATA

Article No	001 117 2071 0145
d (mm)	140
d1 (mm)	63
le (mm)	100
h (mm)	238
h1 (mm)	95
Z (mm)	182
L (mm)	140
Weight (Kg)	1,010
Box Quantity (pcs)	6
Box Dimension (cm)	55x30x36

INJECTION MOULDED

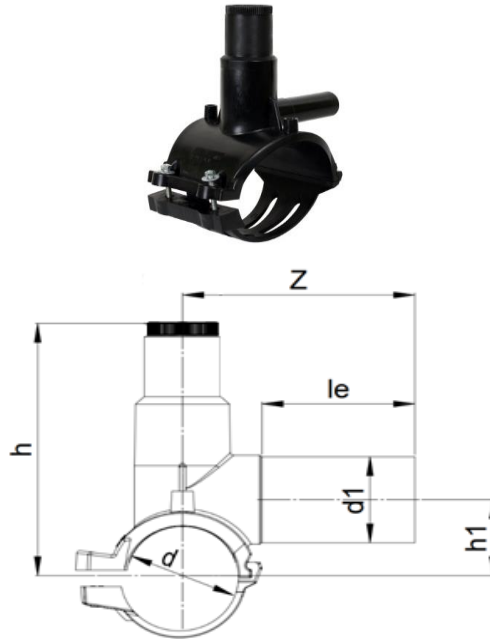

IDENTIFICATION OF PRODUCT

D(mm)	140-63
SDR	11
RAW MATERIAL	PE 100
PRESSURE CLASS	16 Bar Water 10 Bar Gas
TRADEMARK	NTG
EXECUTION	Injection Moulded
STANDARD	EN 12201-3 EN 1555-3 AS / NZS 4129

SPECIFICATION	Suitable for SDR11....17 pipe Injected monobloc type 4 mm pin connectors Long Fusion outlet Hexagon wrench 12 mm O-ring sealed screw cap
---------------	---------------------------------------------------------------------------------------------------------------------------------------------------------

EF SPECIFICATION

WELDING VOLTAGE	40 V
RESISTANCE	7,0 Ω
WELDING TIME	130 Sec.
COOLING TIME	15 Min.
WINDING TYPE	Monofilar
WELDING BARCODE	



Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance $\pm 5\%$. NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.

Fr 161 Rev 00