

TECHNICAL DATASHEET




EF TAPPING SADDLE

04 Update - 05/2024

TECHNICAL DATA

| | |
|-----------------------|-------------------|
| Article No | 001 117 2071 0234 |
| d (mm) | 225 |
| d1 (mm) | 63 |
| le (mm) | 100 |
| h (mm) | 281 |
| h1 (mm) | 137 |
| Z (mm) | 195 |
| L (mm) | 140 |
| Weight (Kg) | 1,260 |
| Box Quantity (pcs) | 4 |
| Box Dimension (cm) | 55x30x37,5 |

INJECTION MOULDED

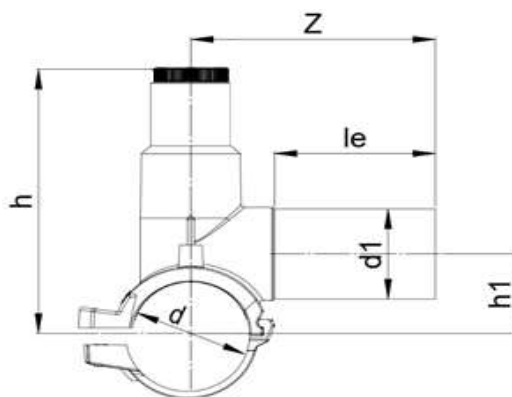

IDENTIFICATION OF PRODUCT

| | |
|----------------|--|
| D(mm) | 225-63 |
| SDR | 11 |
| RAW MATERIAL | PE 100 |
| PRESSURE CLASS | 16 Bar Water 10 Bar Gas |
| TRADEMARK | NTG |
| EXECUTION | Injection Moulded |
| STANDARD | EN 12201-3 EN 1555-3 AS / NZS 4129 |

| | |
|---------------|---|
| SPECIFICATION | Suitable for SDR11....17 pipe Injected monobloc type 4 mm pin connectors Long Fusion outlet Hexagon wrench 12 mm O-ring sealed screw cap |
|---------------|---|

EF SPECIFICATION

| | |
|-----------------|--------------|
| WELDING VOLTAGE | 40 V |
| RESISTANCE | 7,0 Ω |
| WELDING TIME | 130 Sec. |
| COOLING TIME | 15 Min. |
| WINDING TYPE | Monofilar |
| WELDING BARCODE | |



941420324393407005130112

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance \pm 5%. NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.