

TECHNICAL DATASHEET




EF REDUCER

03 Update - 04/2024

TECHNICAL DATA

| | |
|-----------------------|-------------------|
| Article No | 001 117 2080 0034 |
| d1 (mm) | 32 |
| d2 (mm) | 20 |
| D1 (mm) | 44 |
| D2 (mm) | 32 |
| le1 (mm) | 48 |
| le2 (mm) | 32 |
| Z (mm) | 85 |
| m1 (mm) | 27,4 |
| m2 (mm) | 14,2 |
| Weight (Kg) | 0,062 |
| Box Quantity (pcs) | 75 |
| Box Dimension (cm) | 35,5x35,5x27,5 |


INJECTION MOULDED

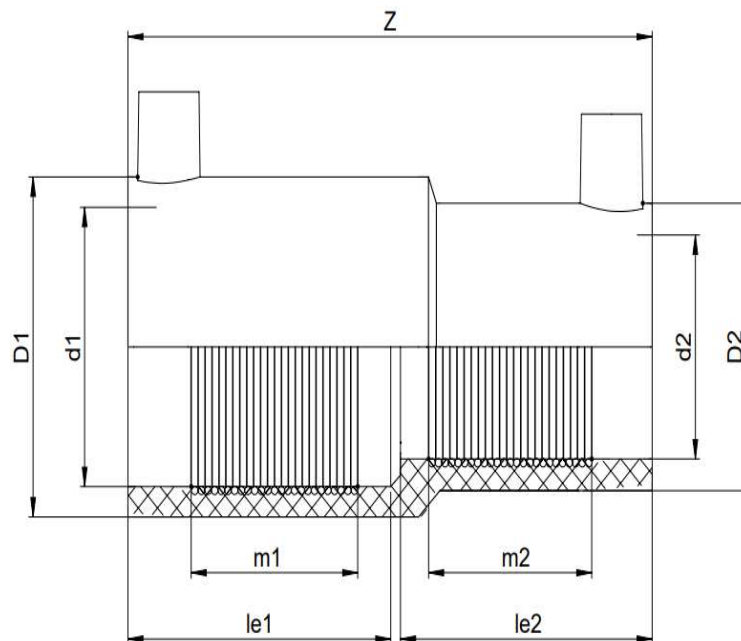

IDENTIFICATION OF PRODUCT

| | |
|----------------|--|
| D(mm) | 32-20 |
| SDR | 11 |
| RAW MATERIAL | PE 100 |
| PRESSURE CLASS | 16 Bar Water 10 Bar Gas |
| TRADEMARK | NTG |
| EXECUTION | Injection Moulded |
| STANDARD | EN 12201-3 EN 1555-3 AS / NZS 4129 |

EF SPECIFICATION

| | |
|-----------------|--|
| WELDING VOLTAGE | 40V |
| RESISTANCE | 3,82 Ω |
| WELDING TIME | 25 Sec. |
| COOLING TIME | 5 Min. |
| WINDING TYPE | Monofilar |
| WELDING BARCODE |  |

931420300623403824025113

| | |
|---------------|--|
| SPECIFICATION | Suitable for SDR9...11 pipe 4 mm pin connectors |
|---------------|--|

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance \pm 5%. NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.