


FLANGE ADAPTOR

03 Update - 07/2022

TECHNICAL DATA

Article No	001 115 1100 0450
d (mm)	450
d1 (mm)	465
d2 (mm)	545
d3 (mm)	442
le (mm)	47
L (mm)	45
Z (mm)	120
s (mm)	26,7
Weight (Kg)	6,555
Box Quantity (pcs)	1
Box Dimension (pcs)	

INJECTION MOULDED

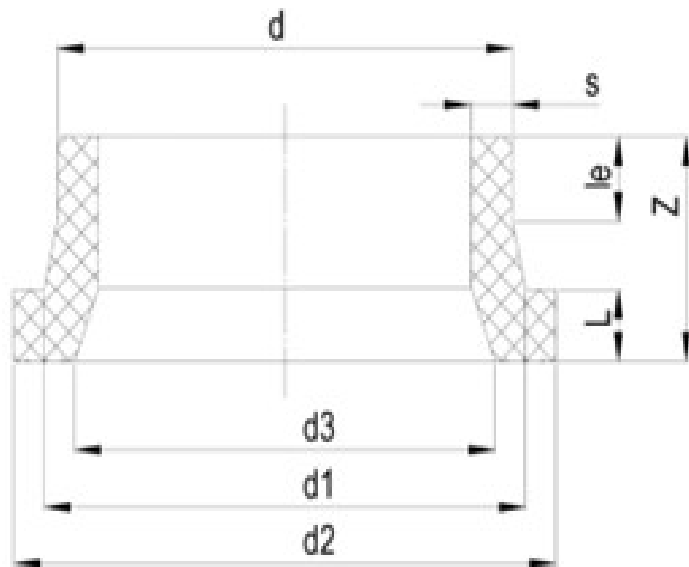

IDENTIFICATION OF PRODUCT

D(mm)	450(DN450)
SDR	17
RAW METARIAL	PE 100
PRESSURE CLASS	10 Bar Water 6 Bar Gas
TRADEMARK	NTG
EXECUTION	Injection Moulded
STANDARD	EN 12201-3 EN 1555-3 AS /NZS 4129

SPECIFICATION

Short Spigot
Suitable for butterfly valve
Suitable for ansi flange

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance $\pm 5\%$. NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.