

TECHNICAL DATASHEET




EF REDUCER

03 Update - 06/2023

TECHNICAL DATA

Article No	001 117 2080 0065
d1 (mm)	63
d2 (mm)	40
D1 (mm)	80
D2 (mm)	54
le1 (mm)	52
le2 (mm)	45
Z (mm)	102
m1 (mm)	26,4
m2 (mm)	21,6
Weight (Kg)	0,168
Box Quantity (pcs)	60
Box Dimension (cm)	55x30x37,5

INJECTION MOULDED

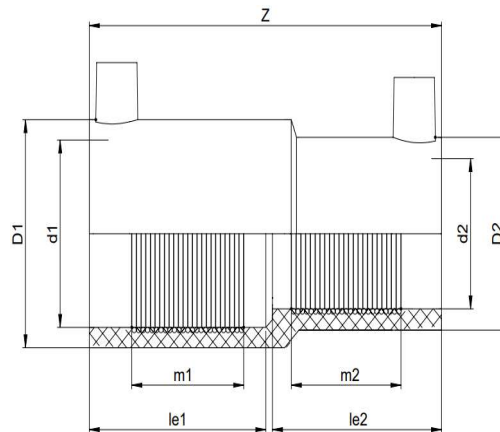

IDENTIFICATION OF PRODUCT

D(mm)	63-40
SDR	11
RAW MATERIAL	PE 100
PRESSURE CLASS	16 Bar Water 10 Bar Gas
TRADEMARK	NTG
EXECUTION	Injection Moulded
STANDARD	EN 12201-3 EN 1555-3 AS / NZS 4129
SPECIFICATION	Suitable for SDR9...11 pipe 4 mm pin connectors

EF SPECIFICATION

WELDING VOLTAGE	40V
RESISTANCE	0,97 Ω
WELDING TIME	35 Sec.
COOLING TIME	10 Min.
WINDING TYPE	Monofilar
WELDING BARCODE	



931420311583400976035112

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance $\pm 5\%$. NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.