


## EF REDUCER

03 Update - 04/2024

### TECHNICAL DATA

Article No	001 117 2080 0183
d1 (mm)	180
d2 (mm)	125
D1 (mm)	220
D2 (mm)	157
le1 (mm)	116
le2 (mm)	91
Z (mm)	224
m1 (mm)	78,5
m2 (mm)	41
Weight (Kg)	2,256
Box Quantity (pcs)	4
Box Dimension (cm)	55x30x37,5

### INJECTION MOULDED

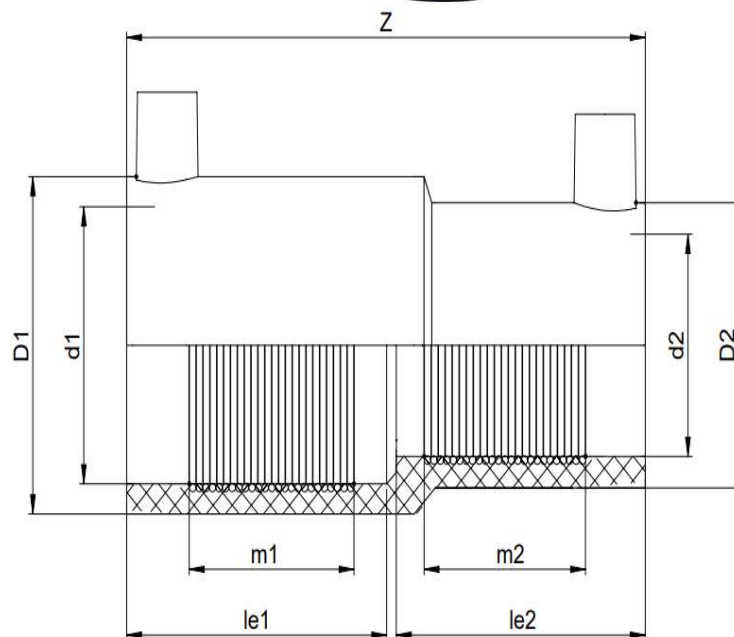

### IDENTIFICATION OF PRODUCT

D(mm)	180-125
SDR	11
RAW MATERIAL	PE 100
PRESSURE CLASS	16 Bar Water 10 Bar Gas
TRADEMARK	NTG
EXECUTION	Injection Moulded
STANDARD	EN 12201-3 EN 1555-3 AS / NZS 4129

### EF SPECIFICATION

WELDING VOLTAGE	40V
RESISTANCE	0.90 Ω
WELDING TIME	400 Sec.
COOLING TIME	20 Min.
WINDING TYPE	Monofilar

#### WELDING BARCODE



931420333813400906400119

### SPECIFICATION

Suitable for SDR11....17pipe  
4 mm pin connectors

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance  $\pm 5\%$ . NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.