

TECHNICAL DATASHEET




TRANSITION ADAPTOR PE-STEEL

03 Update - 06/2023

TECHNICAL DATA

| | |
|------------------------|-------------------|
| Article No | 001 117 6180 0315 |
| d (mm) | 315 |
| R (inch) | 12" |
| le (mm) | 158 |
| Z (mm) | 850 |
| s1 (mm) | 28,6 |
| Weight (Kg) | 107,000 |
| Box Quantity (pcs) | 1 |
| Box Dimension (pcs) | |

INJECTION MOULDED

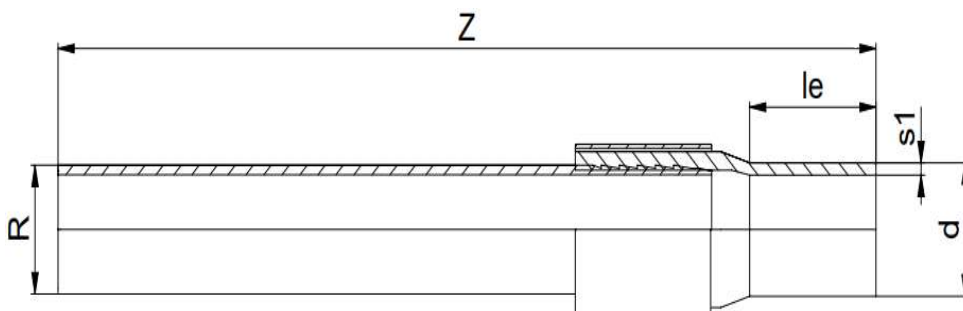

IDENTIFICATION OF PRODUCT

| | |
|----------------|-------------------------|
| D | 315x12" |
| SDR | 11 |
| RAW METARIAL | PE 100 |
| PRESSURE CLASS | 16 Bar Water 10 Bar Gas |
| TRADEMARK | NTG |
| EXECUTION | Injection Moulded |
| STANDARD | EN ISO 10838-2 |

SPECIFICATION

| |
|------------------------|
| Long Spigot |
| Welding end |
| Steel pipe GR-B API 5L |
| PE part injected |

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance $\pm 5\%$. NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.

Fr 161 Rev 00