


REDUCER

03 Update - 06/2022

TECHNICAL DATA

| | |
|------------------------|-------------------|
| Article No | 001 117 0080 0033 |
| d1 (mm) | 32 |
| d2 (mm) | 25 |
| Z (mm) | 130 |
| le1 (mm) | 56 |
| le2 (mm) | 52 |
| s1 (mm) | 3,0 |
| s2 (mm) | 3,0 |
| Weight (Kg) | 0,030 |
| Box Quantity (pcs) | 50 |
| Box Dimension (pcs) | 27,5x24x23 |

INJECTION MOULDED

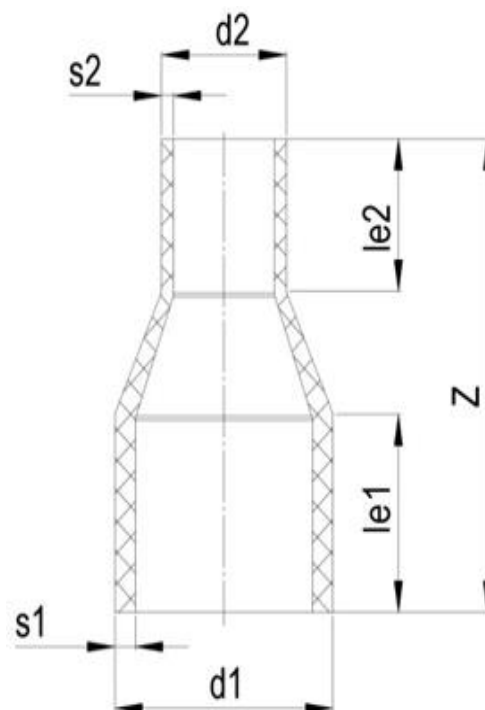

IDENTIFICATION OF PRODUCT

| | |
|----------------|---|
| D(mm) | 32-25 |
| SDR | 11 |
| RAW METARIAL | PE 100 |
| PRESSURE CLASS | 16 Bar Water 10 Bar Gas |
| TRADEMARK | NTG |
| EXECUTION | Injection Moulded |
| STANDARD | EN 12201-3 EN 1555-3 AS /NZS 4129 |

SPECIFICATION

Long Spigot

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance $\pm 5\%$. NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.